

# Paving Tiles

- Typically used for heavy duty and recreational areas that require high safety & durability.



## PRODUCT SPECIFICATIONS

### Material Data

Description	: SBR Safety Recycled Rubber Tiles
Materials	: SBR pigmented shred rubber with rubber granules
Method	: Both bonded with molded MDI based binder
Colours Option	: Pigmented series, Speckled series, Full EPDM series (Refer to color chart code)



### H Paver

Shape	: H design
Dimension (mm)	: 304 x 304
Thickness (mm)	: 25 to 45
1 sq meter	: 12 pcs





### 6-H Paver

Shape	: 6 in 1 H Paver
Dimension (mm)	: 912 x 528
Thickness (mm)	: 25 to 45
1 sq meter	: 2 pcs

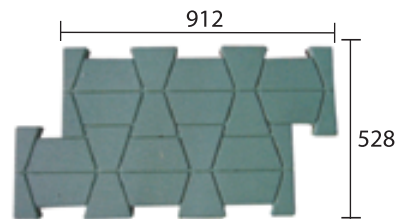

### Double T

Shape	: I or double T design
Dimension (mm)	: 200 x 250 x 20 thickness
1 sq meter	: 24 pcs
Dimension (mm)	: 200 x 160 x 20 (up to 45mm thickness)
1 sq meter	: 36 pcs



### Commons Uses:

- Side Walks
- Walkways
- Horse Stable
- Driveways
- Animal Areas

MIROAD reserves the right to make changes without notices.



**MIROAD RUBBER INDUSTRIES SDN BHD** (629141-D)  
http://www.miroadrubber.com • Email: sales@miroadrubber.com

YOUR SAFETY PARTNER

