

# Interlock Tiles

- Soft, resilient and unique lock features are the ideal surface for playground, fitness centre, exhibition halls and etc.
- Integrated connectors allow fast installation with loose lay, no-glue and easy replacement.


## PRODUCT SPECIFICATIONS

### Material Data

- Description : SBR Safety Recycled Rubber Tiles  
 Materials : Top layer – 7-8mm thick of SBR pigmented shred rubber  
 Bottom layer – SBR shred rubber with rubber granules  
 Method : Both bonded with molded MDI based binder  
 Colours Option : Pigmented series, Speckled series, Full EPDM series  
 (Refer to color chart code)


### Square Tile c/w Pin-Hole

- Shape : Square / Rectangle  
 Dimension (mm) : 500 x 500, 500 x 250  
 Thickness (mm) : 40 to 75

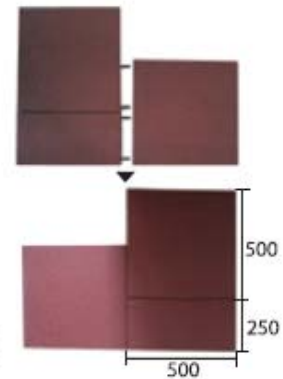

### Hexagon Tile

- Shape : Hexagon  
 Dimension (mm) : 500 x Hexagon, 300 x Hexagon  
 Thickness (mm) : 25 to 75



### Technical Data & Physical Test

BS 7188 : 1989 (section 6) – Ease of Ignition  
 Extinction of flame : 5 seconds  
 Radius of burnt area : 25mm

BS 7188 : 1989 (section 4) - Skid Resistance  
 Dry (BPN) : 80 at both 0° & 180°  
 Wet (BPN) : 55 at 0° & 50 at 180°

ISO 4662 : 1986 – Rebound Resilience  
 Dunlop Resilience : 61% (Room Temperature)

DIN 53571 : 1971  
 Tensile Stress-Strain Properties  
 Elongation at break : 0.26Mpa, 10kp/cm<sup>2</sup>

DIN EN 1177 : 2002-03-Impact Attenuation  
 Report No : 07799343181 (Tested in TÜV Thüringen GmbH)

Critical Heights	Dimension
2200 mm	500 x 500 x 45mm

MIROAD reserves the right to make changes without notices.



**MIROAD RUBBER INDUSTRIES SDN BHD** (629141-D)  
<http://www.miroadrubber.com> • Email: [sales@miroadrubber.com](mailto:sales@miroadrubber.com)

YOUR SAFETY PARTNER